



FEATURE	ADVANTAGE	BENEFIT
Extra-large 460 cc clubhead	Highest MOI of any TaylorMade driver	Tremendous forgiveness for long, straight results on off-center hits
Movable Weight Technology™ with 4 cartridges: (1) 2-gram, (1) 6-gram, (1) 10-gram, and (1) 14-gram cartridge	Permits 12 CG positions; 4 at standard swing weight	Shot-shape movement of up to 15 yards to the right or left
Square clubface alignment	Preferred by skilled players	Increased confidence and accuracy
Exceptionally low-deep CG and massive clubface area	Super-easy to launch on a higher trajectory	Promotes long carry and phenomenal distance
TaylorMade RE*AX™ 64 TP shaft manufactured by Mitsubishi	Sophisticated design for tour-caliber performance that's easy to hit	Exceptional consistency and head stability at higher clubhead speeds
Large, beautifully shaped footprint	Strong and powerful address appearance	Builds confidence
Inverted Cone Technology	Dramatically expands the portion of the clubface that delivers high COR	Consistently longer drives

WARRANTY INFORMATION

Damage that results from the failure to follow the instructions in the user's manual is not covered under the Limited Consumer Warranty. Visit [taylormadegolf.com](http://taylormadegolf.com) or see your retailer for a copy of the Limited Consumer Warranty which contains specific limitations.




**TECH**

**r7<sup>®</sup> 460 TP** *Tour-Proven Power:  
The r7 460 TP Driver  
with MWT™*



- 1** MORE DRAW
- 2** SLIGHT DRAW
- 3** SLIGHT FADE
- 4** MORE FADE

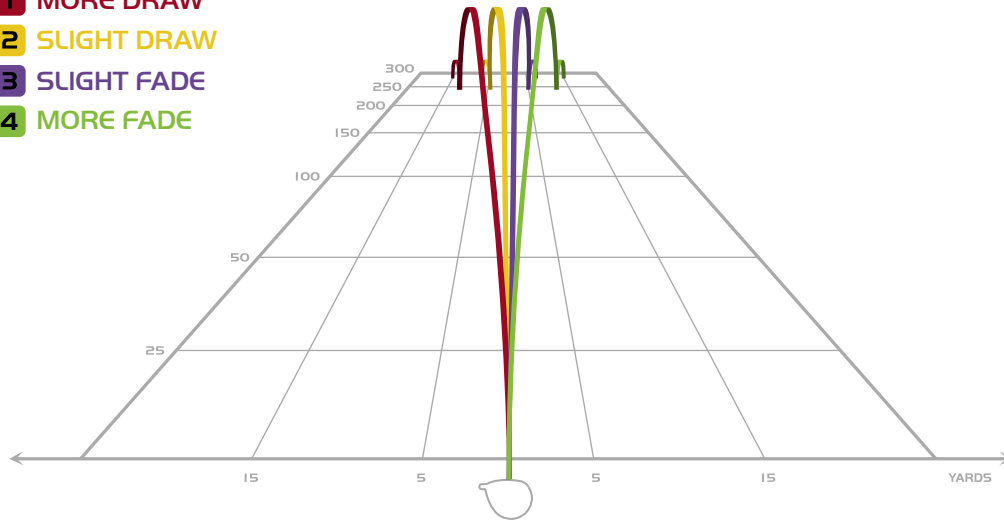

**R7 460 TP DRIVER SPECIFICATIONS**

Club	Left-Handed	Loft	Lie	Head Volume	Club Length	Swing Weight
8.5		8.5	59°	460 cc	45"	D3
9.5	Yes	9.5	59°	460 cc	45"	D3
10.5	Yes	10.5	59°	460 cc	45"	D3

**R7 460 TP SHAFT SPECIFICATIONS**

Shaft	Flex	Shaft Torque	Tip Size	Butt Diameter	Shaft Weight	Grip	Grip Weight
RE•AX 64 TP* by Mitsubishi	X	3.1°	.335"	.610"	64 g	TV 58R	50 g
	S	3.1°	.335"	.610"	64 g	TV 58R	50 g
	R	3.2°	.335"	.610"	64 g	TV 58R	50 g
RE•AX 54 TP by Mitsubishi	X	3.1°	.335"	.605"	54 g	TV 58R	50 g
	S	3.1°	.335"	.605"	54 g	TV 58R	50 g
	R	3.2°	.335"	.600"	54 g	TV 58R	50 g
RE•AX 75 TP by Fujikura	X	2.5°	.335"	.600"	75 g	TV 58R	50 g
	S	2.5°	.335"	.600"	75 g	TV 58R	50 g
	R	2.5°	.335"	.600"	75 g	TV 58R	50 g
RE•AX 65 TP by Fujikura	X	2.8°	.335"	.600"	65 g	TV 58R	50 g
	S	2.8°	.335"	.600"	65 g	TV 58R	50 g
	R	2.8°	.335"	.600"	65 g	TV 58R	50 g
RE•AX 55 TP by Fujikura	X	3.5°	.335"	.600"	55 g	TV 58R	50 g
	S	3.5°	.335"	.600"	55 g	TV 58R	50 g
	R	3.5°	.335"	.600"	55 g	TV 58R	50 g

\*r7 460 TP Stock Shaft Specifications.